

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



FGAF40N60UF 600 V PT IGBT

General Description

Fairchild's UF series of IGBTs provide low conduction and switching losses. The UF series is designed for applications such as general inverters and PFC where high speed switching is a required feature.

Features


- · High Speed Switching
- Low Saturation Voltage: $V_{CE(sat)} = 2.3 \text{ V} @ I_C = 20 \text{ A}$
- High Input Impedance

Applications

General Inverter, PFC



GCE



Absolute Maximum Ratings T_C = 25°C unless otherwise noted


Symbol	Description		Ratings	Unit	
V_{CES}	Collector-Emitter Voltage		600	V	
V _{GES}	Gate-Emitter Voltage		± 20	V	
	Collector Current	@ T _C = 25°C	40	Α	
I _C	Collector Current	@ T _C = 100°C	20	Α	
I _{CM (1)}	Pulsed Collector Current		160	Α	
P _D	Maximum Power Dissipation	@ T _C = 25°C	100	W	
	Maximum Power Dissipation	@ T _C = 100°C	40	W	
T _J	Operating Junction Temperature		-55 to +150	°C	
T _{stg}	Storage Temperature Range		-55 to +150	°C	
T _L	Maximum Lead Temp. for Soldering Purposes, 1/8" from Case for 5 Seconds		300	°C	

Notes: (1) Repetitive rating: Pulse width limited by max. junction temperature

Thermal Characteristics

Symbol	Parameter	Тур.	Max.	Unit
$R_{\theta JC}(IGBT)$	Thermal Resistance, Junction-to-Case		1.2	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	-	40	°C/W

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Cha	racteristics					
BV _{CES}	Collector-Emitter Breakdown Voltage	$V_{GE} = 0 \text{ V, } I_{C} = 250 \text{ uA}$	600			V
$\Delta B_{VCES}/$ ΔT_J	Temperature Coefficient of Breakdown Voltage	V _{GE} = 0 V, I _C = 1 mA		0.6		V/°C
I _{CES}	Collector Cut-Off Current	V _{CE} = V _{CES} , V _{GE} = 0 V			250	uA
I_{GES}	G-E Leakage Current	$V_{GE} = V_{GES}, V_{CE} = 0 V$			± 100	nA
On Cha	racteristics					
V _{GE(th)}	G-E Threshold Voltage	I_C = 20 mA, V_{CE} = V_{GE}	3.5	5.1	6.5	V
	Collector to Emitter	I _C = 20 A, V _{GE} = 15 V		2.3	3.0	V
V _{CE(sat)}	Saturation Voltage	I _C = 40 A, V _{GE} = 15 V		3.1		V
	- Ol and at an at the	, 5		1	<u> </u>	
	c Characteristics					
C _{ies}	Input Capacitance	$V_{CE} = 30 \text{ V}, V_{GE} = 0 \text{ V},$		1075		pF
C _{oes}	Output Capacitance	f = 1 MHz		170		pF
C _{res}	Reverse Transfer Capacitance			50		pF
Switchi	ng Characteristics					
t _{d(on)}	Turn-On Delay Time			15		ns
t _r	Rise Time			30		ns
t _{d(off)}	Turn-Off Delay Time	$V_{CC} = 300 \text{ V}, I_{C} = 20 \text{ A},$		65	130	ns
t _f	Fall Time	$R_G = 10 \Omega, V_{GE} = 15 V,$		35	100	ns
E _{on}	Turn-On Switching Loss	Inductive Load, T _C = 25°C		470		uJ
E _{off}	Turn-Off Switching Loss			130		uJ
E _{ts}	Total Switching Loss			600	1000	uu
ເວ	Total Civitoring Loop			000		uJ
	Turn-On Delay Time			30		
t _{d(on)}	5					uJ
t _{d(on)}	Turn-On Delay Time	V _{CC} = 300 V, I _C = 20 A,		30	 200	uJ ns
t _{d(on)} t _r t _{d(off)}	Turn-On Delay Time Rise Time	$V_{CC} = 300 \text{ V}, I_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$		30 37		uJ ns ns
$t_{d(on)}$ t_r $t_{d(off)}$	Turn-On Delay Time Rise Time Turn-Off Delay Time			30 37 110	 200	uJ ns ns ns
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on}	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time	$R_G = 10 \Omega, V_{GE} = 15 V,$	 	30 37 110 80	 200 250	uJ ns ns ns
t _{d(on)} t _r t _{d(off)} t _f E _{on}	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss	$R_G = 10 \Omega, V_{GE} = 15 V,$	 	30 37 110 80 500	 200 250	ns ns ns ns uJ
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off} E_{ts}	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss	$R_G = 10 \Omega$, $V_{GE} = 15 V$, Inductive Load, $T_C = 125^{\circ}C$	 	30 37 110 80 500 310	200 250 	ns ns ns ns ns uJ uJ
$\begin{array}{c} t_{d(on)} \\ t_r \\ t_{d(off)} \\ t_f \\ E_{on} \\ E_{off} \\ E_{ts} \\ Q_g \end{array}$	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss	$R_G = 10 \Omega$, $V_{GE} = 15 V$, Inductive Load, $T_C = 125^{\circ}C$ $V_{CE} = 300 V$, $I_C = 20 A$,	 	30 37 110 80 500 310 810	200 250 1200	ns ns ns ns ns uJ uJ
$\begin{array}{c} t_{d(on)} \\ t_{r} \\ t_{r} \\ t_{d(off)} \\ t_{f} \\ E_{on} \\ E_{off} \\ E_{ts} \\ Q_{g} \\ Q_{ge} \\ Q_{gc} \\ \end{array}$	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Total Gate Charge	$R_G = 10 \Omega$, $V_{GE} = 15 V$, Inductive Load, $T_C = 125^{\circ}C$	 	30 37 110 80 500 310 810 77	 200 250 1200 150	ns ns ns ns uJ uJ uJ







Fig 1. Typical Output Characteristics

Fig 2. Typical Saturation Voltage Characteristics







Fig 3. Saturation Voltage vs.

Case Temperature at Variant Current Level

Fig 4. Load Current vs. Frequency







Fig 5. Saturation Voltage vs. V_{GE}

Fig 6. Saturation Voltage vs. V_{GE}







Fig 7. Capacitance Characteristics

Fig 8. Turn-On Characteristics vs.
Gate Resistance







Fig 9. Turn-Off Characteristics vs.
Gate Resistance

Fig 10. Switching Loss vs. Gate Resistance







Fig 11. Turn-On Characteristics vs. Collector Current

Fig 12. Turn-Off Characteristics vs. Collector Current







Fig 13. Switching Loss vs. Collector Current

Fig 14. Gate Charge Characteristics






Fig 15. SOA Characteristics

Fig 16. Turn-Off SOA Characteristics

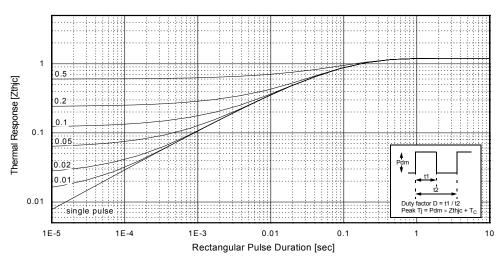


Fig 17. Transient Thermal Impedance of IGBT

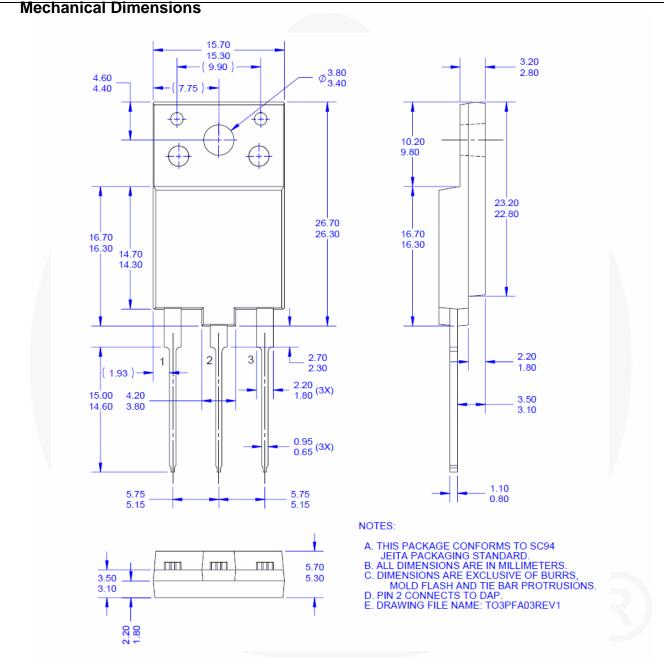


Figure 18. TO3PF,MOLDED,3LD,FULLPACK (AG)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TF3PF-003





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ AX-CAF BitSiC™ Build it Now™ CorePLUS™ CorePOWER™

 $\begin{array}{c} CROSSVOLT^{\text{\tiny TM}} \\ CTL^{\text{\tiny TM}} \end{array}$ Current Transfer Logic™ DEUXPEED® Dual Cool™ EcoSPARK® EfficentMax™ ESBC™

Fairchild[®]

Fairchild Semiconductor® FACT Quiet Series™ FACT® FAST® FastvCore™ FETBench™

F-PES™ FRFET®

Global Power ResourceSM GreenBridge™

Green FPS™

Green FPS™ e-Series™

G*max*™ GTO™ IntelliMAX™ ISOPLANAR™

Marking Small Speakers Sound Louder

and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ mWSaver® OptoHiT™ OPTOLOGIC®

OPTOPLANAR®

PowerTrench® PowerXS™

®

Programmable Active Droop™ QFĔT

QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™

Sync-Lock™ SYSTEM ®* **TinyBoost** TinyBuck[®] TinyCalc™ TinyLogic[®] TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™ TRUECURRENT®* μSerDes™

UHC® Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

FPS™

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their

parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 166

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative